


Industrial Safety Cabinet (for flammable liquid storage)

We has various industrial safety cabinets of different dimensions, which provide safe storage for flammable liquid and chemicals. It features compact size, storing easily flammable liquid and organic solvent, saving much troubles and time spent on the way to retrieve them in dangerous goods room.

1. Simple introduction

Even in small working space, compact industrial safety cabinet provides you complete safety and convenience in storing flammable liquid and chemicals.

- FSM series industrial safety cabinet complies with OSAH 29 CER 1910.106 and NFPA CODE 30, FM standard
- Complete double layer fire proof sheet steel, 38mm insulation layer is put in between double layer wall space
- Sheet steel of thickness over 1.2mm all-welded together making it more durable and robust, with better fire proof capacity
- Three point inter-active locking system, easy open-close 180 degree cabinet door with double keys

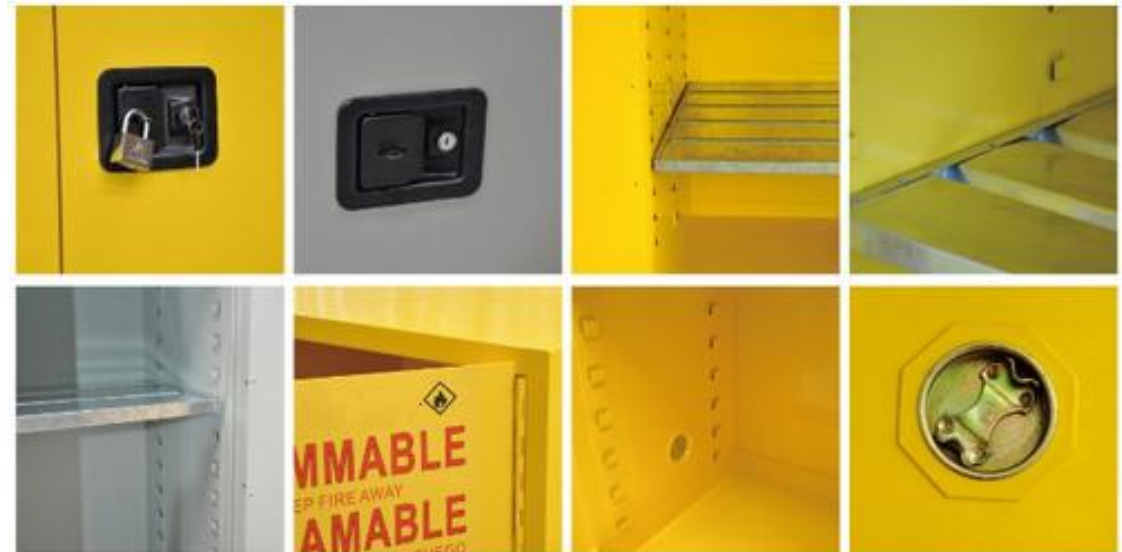

- Spill control sill of 5cm height prevent maximum leak control on accidental spill
- Professional and standard warning label of high visibility
- Double vents with flame arrestor set on the cabinet
- Unique spill control and leakage shelves can be easily adjusted between up-down hooking supporter
- Inside of cabinet is sprayed with permanent and lead-free paints
- Three colors differentiates clearly different types of liquid. Yellow represents flammable liquid storage, Red represents combustible liquid storage and Blue represents corrosive liquid storage

2. Standard accessories

- Key
- Adjustable bolt
- Ground clamp
- Manual

Sturdy 1 mm double wall steel with 38 mm of insulating air space.

Easy-close, self-latching doors; handle does not require manual rotation to engage mandatory three point latch for protection under fire conditions.

Fully welded, not riveted construction holds firmness for longer life, offering greater protection in a fire since air gaps are reduced.

Continuous piano hinge provides smooth closure.

Durable and chemical resistant, lead-free powder-coat paint finish, inside and out, retains high gloss look and minimizes the effects of corrosion and humidity.


Dual vents with built in flash-arresters strategically placed at bottom and opposite top.






3. Main features


- Color yellow is for flammable liquid storage
- High quality with OSHA 29 CFR 1910.106, NFPA CODE30 and FM standard
- 1.2mm steel plate after welding with good fireproofing
- Double fireproof steel plate structure, 38mm insulating layer between two plates
- Cabinet door 180 degree with double keys
- Electrostatic spray technology
- Adopt OSHA standard, it is set electrostatic grounding conduction port on the side of cabinet door, easy to connect grounding wire
- 50mm height leakproof slot to avoid liquid leakage
- Eye-catching warning labels
- Double air vent

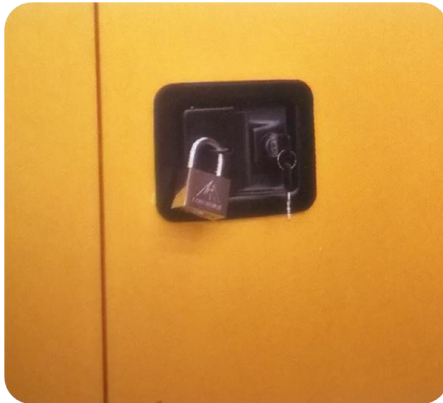

Double keys design, padlock to ensure the safety

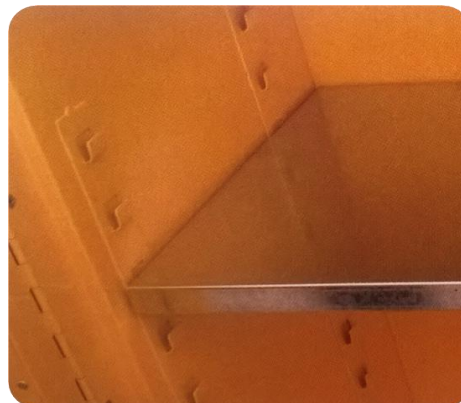

Safety baffle can be freedom adjust in every 60mm height, meet the ANSI standard

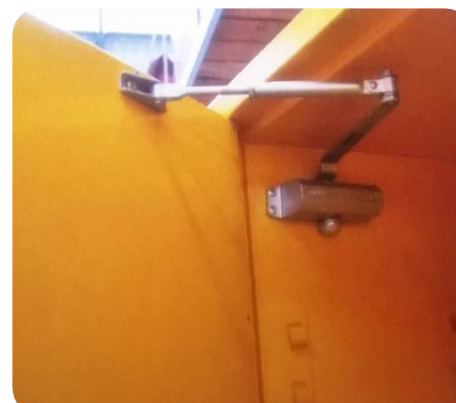

Continuous hinge to ensure smoothly close



Double air vent in the inside, one is on the top and the other is on the side

Note: meet requirements of USA OSHA 29 CFR 1910.106 and NFPA 30 (part 4.3.3), 10 years limited warranty

Model	Outside dimensions (H*W*D/ mm)	Weight (kg)	Adjustable shelves/ capacity (kg)	Volume (Gallon/ Liter)	Number of the door and type	EXW Price
FSM0004	560*430*430	35	1/ 50	4/ 15	Single door	USD155
FSM0012	890*590*460	56	1/ 50	12/ 45	Single door	USD188
FSM0022	1650*590*490	85	2/ 50	22/ 83	Single door	USD262
FSM0030	1120*1090*460	100	1/ 50	30/ 114	Double door	USD282
FSM0045	1650*1090*460	138	2/ 100	45/ 170	Double door	USD370
FSM0060	1650*860*860	165	2/ 100	60/ 227	Double door	USD430
FSM0090	1650*1090*860	190	2/ 100	90/ 340	Double door	USD480
FSM0110	1650*1500*860	270	2/ 100	110/ 410	Double door	USD530

